

HVE 01




High performance steel anchor with 8.8 grade Hex Head screw and special hardness washer with PATENTED design, zinc plated, Certified ETA-CE Option 1 and Performance Category C1 Under Seismic Action

Cheville haute performances en acier zingué avec vis tête hexagonale classe 8.8 et rondelle spéciale, avec certification ETE-CE Option 1 et catégorie de performance C1 en zone sismique

Verzinkter Hochleistungs - Schwerlastanker mit Sechskantschraube Klasse 8.8 und spezieller Scheibe, mit ETB-CE Zulassung Option 1 und seismische Leistungskategorie C1

Anclaje de acero cincado para Altas Prestaciones, montado con tornillo cabeza hexagonal clase 8.8 y arandela de dureza especial, con geometrías PATENTADAS, Homologada ETA-CE Opción 1 y Categoría de prestación C1 para fijaciones en zonas sísmicas

Высокоэффективный стальной оцинкованный анкер с болтом с шестигранной головкой класса 8.8 и шайбой особой прочности, Сертифицирован ETA-CE Опция 1 и Категория C1 для сейсмических воздействий

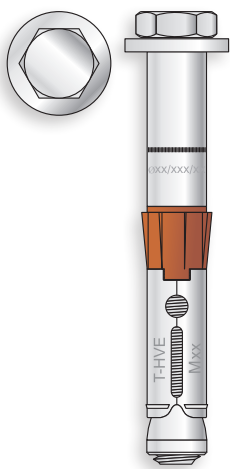

Item code	Anchor size Ø x La / t _{fix} (mm)	Screw size M	Pcs. per box	Pcs. per carton
Ø 10 - M6 - AF 10				
HVE 01 10 070	10 x 70 / 5	M6	50	500
HVE 01 10 080	10 x 80 / 15	M6	50	500
HVE 01 10 100	10 x 100 / 35	M6	50	500
HVE 01 10 120	10 x 120 / 55	M6	25	250
Ø 12 - M8 - AF 13				
HVE 01 12 080	12 x 80 / 10	M8	50	250
HVE 01 12 100	12 x 100 / 30	M8	25	250
HVE 01 12 120	12 x 120 / 50	M8	25	250
HVE 01 12 140	12 x 140 / 70	M8	25	250
Ø 16 - M10 - AF 17				
HVE 01 16 100	16 x 100 / 20	M10	20	100
HVE 01 16 120	16 x 120 / 40	M10	20	100
HVE 01 16 140	16 x 140 / 60	M10	20	100
HVE 01 16 160	16 x 160 / 80	M10	20	100
Ø 18 - M12 - AF 19				
HVE 01 18 120	18 x 120 / 20	M12	10	100
HVE 01 18 150	18 x 150 / 50	M12	10	50
HVE 01 18 170	18 x 170 / 70	M12	10	50
HVE 01 18 200	18 x 200 / 100	M12	10	50
Ø 24 - M16 - AF 24				
HVE 01 24 140	24 x 140 / 20	M16	5	25
HVE 01 24 170	24 x 170 / 50	M16	5	25
HVE 01 24 200	24 x 200 / 80	M16	5	25
HVE 01 24 220	24 x 220 / 100	M16	5	25



European Technical Assessment
ETAG 001 - PART 1 and 2 and ANNEX E
OPTION 1: for cracked and non-cracked concrete
Seismic assessment: performance category C2 - C1
 DoP available on www.tecfi.it/DoP

- ETA-CE Option 1 Certified item / Agrément technique européen ATE-CE / ETA-CE Zulassung / Homologación ETA-CE / Сертификация ETA-CE**
- ETAG 001 - ANNEX E (C2 - C1) - Item assessed Under Seismic Action / Article évalué en zone sismique / Artikel mit Bewertung von seismischer Leistungskategorie / Evaluación para fijaciones en zonas sísmicas / Одобрен для сейсмических воздействий**
- R120 Fire Resistance Certified item / Résistance au feu / Feuerwiderstand / Homologación de resistencia al fuego / Сертификат пожаробезопасности**

Application submitted for an ICC-ES evaluation report covering seismic action in accordance with ACI 355.2.

Usage / Utilisation / Benutzung / Uso / Применение




For through (in-place) heavy duty fixings in cracked and non-cracked concrete, performance Category C2 and C1 for use under seismic action, according to ETAG 001 - ANNEX E.
 Item included in **TADS - Tecfi Anchor Design Software** for computer aided design of Anchorage.

DoP



Declaration of Performance

Installation sequence / Instructions de mise en oeuvre / Setzanweisung / Secuencia de instalación / Порядок монтажа

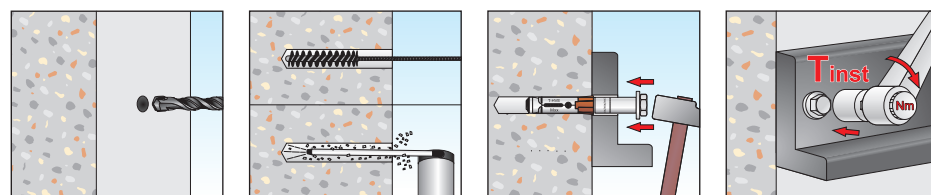

Box / Boîte / Verpackung / Caja / Упаковка



Related products

106

